TCB-CBS10 – THERMAL CONDUCTIVE BRAID CBS10



Features

- OFHC copper, annealed
- Gold plated end plates
- Interfaces with CBS10
- Non-magnetic

Description / Applications

Cooling of an experiment can be a challenge, especially in a vacuum without exchange gas. Introducing a Thermal Conductive Braid will help, as it forms a flexible bridge of high thermal conductivity between cold plate and experiment. A TCB can be integrated in any design, but end plates are matched for use with specific JPE positioners. One end plate is sandwiched between the cold plate and positioner, while the other is screwed to the top of the positioner.

Specifications

General info	
End plate compatibility	CBS10
Dimensions	See drawings below
Operational environmental conditions	20 mK to 375 K, ambient to UHV
Weight	21 g
Thermal properties	
Thermal conductance @5K	25 [mW/K]
Materials	
Main body	OFHC copper with gold plated end plates
Model specific information	
-65	Foil length is 65 mm, for use with a xyz stack
-V, -HV or -UHV	Level of vacuum compatibility, see the glossary on the homepage for details

Ordering Information

Available Models

TCB-CBS10-65-UHV	Thermal Conductive Braid for CBS10 – length 65 mm

Available Options

None	Default delivery condition is Ultra High Vacuum compatible

Accessories

None

Mechanical and electrical information


Download 3D step files and manuals from:
https://www.jpe-innovations.com/cryo-nano-products/

Contact

For quotations, specials, or engineering services, please contact us at:
https://www.jpe-innovations.com/contact/

© JPE. Subject to change without notice. All data are outdated by any new release.
JPE disclaims any liability with regard to the accuracy, completeness, and timeliness of the information provided.

Drawings

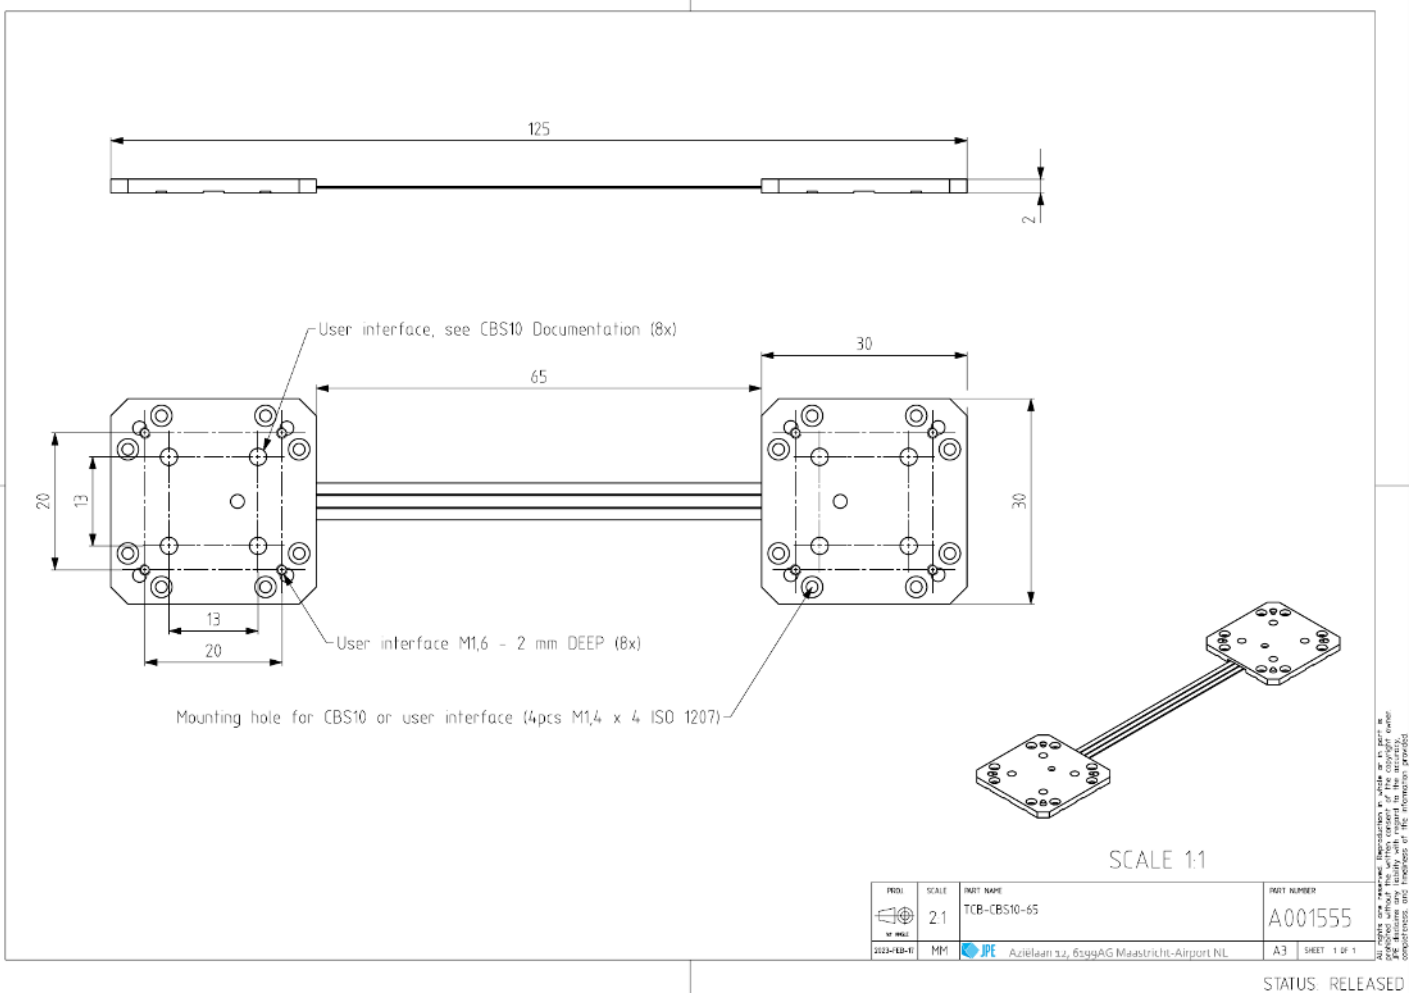

© JPE. Subject to change without notice. All data are outdated by any new release.
JPE disclaims any liability with regard to the accuracy, completeness, and timeliness of the information provided.