CPSHR3 – CRYO POSITIONING STAGE HIGH RESONANCE 3



Features

- xyz motion for very stable cavity measurements
- Parallel kinematics for optimized stiffness
- High resonance frequencies
- Coarse motion using Cryo Linear Actuators
- Position feedback option -COE
- Scanning motion integrated
- 20mK to 375K, vacuum compatible
- Compatible with CVIP2 vibration isolator

Description / Applications

The Cryo Positioning Stage High Resonance (CPSHR) is a XYZ positioning stage developed for operation in a cryo-vacuum environment, especially suited for very stable cavity measurements. Parallel kinematics result in a light and stiff stage with very high internal resonance frequencies, making it less sensitive to floor vibrations. The CPSHR3 has a large stroke and the aluminum construction offers optimal thermal conductance while maintaining the high resonances.

Specifications

General info	
Type of motion	xyz with parasitic angular motion
Parasitic angle from xy stroke	17 mrad/mm, about the x and y axis
1st natural frequency	xy: 2,0 kHz / z: 3,7 kHz (xy: 1,5 kHz for the -S models)
Dimensions	See drawings below
Operational environmental conditions	20 mK to 375 K, ambient to UHV
Weight	510 g, -COE adds 30 g
Stepping motion	
Travel range	x ±8,0 mm / y ±9,2 mm / z ±3,0 mm (not simultaneously)
Actuator	CLA2601, see drawings for calculating actuator outputs to system motion
Minimal step size @ 300 K	5 nm
Minimal step size @ 4 K	1 nm
Scanning motion	
Actuator	Piezo actuators, see drawings for calculating piezo outputs to system motion
Scanning range @ 300 K, typical	x 37.5 µm / y 43.3 µm / z 8 µm (not simultaneously)
Scanning range @ 4 K, typical	x ±15 µm / y ±17.3 µm / z ±1,6 µm (not simultaneously)
Minimal step size	Sub-nm
Drive voltage @ 300 K	-30 V to 120 V
Drive voltage @ 4 K	-150 V to 150 V
Forces and load capacity	
Load capacity	200 g
Materials	
Main body	Aluminum
CLA2601	Stainless steel, ceramic, piezo actuator*
Scanner	Piezo actuator*
*Piezo actuator	Low voltage multilayer, ceramic insulated
Model specific information	
-S	xyz scanner added, see above for range
-COE	Optical Encoder on each CLA2601, 850 pulses per revolution, equivalent to 294 nm axial displacement
-V, -HV or -UHV	Level of vacuum compatibility, see the glossary on the homepage for details
Electronics CPSC	
Controller Base Cabinet	CAB
Driver for stepping and scanning	CADM or PSM (scanning only)
Position readout	OEM

© JPE. Subject to change without notice. All data are outdated by any new release.
JPE disclaims any liability with regard to the accuracy, completeness, and timeliness of the information provided.

Ordering Information

Available Models

CPSHR3-V	Cryo Positioning Stage High Resonance 3
CPSHR3-S-V	Cryo Positioning Stage High Resonance 3-Scanner
CPSHR3-COE-V	Cryo Positioning Stage High Resonance 3-Cryo Optical Encoder
CPSHR3-S-COE-V	Cryo Positioning Stage High Resonance 3-Scanner-Cryo Optical Encoder

Available Options

-HV	Upgrade to High Vacuum compatibility
-UHV	Upgrade to Ultra High Vacuum compatibility

Accessories

AKM1	Accessory Kit Mechanical 1
AKE1	Accessory Kit Electrical 1


Mechanical and electrical information

Download 3D step files and manuals from:
https://www.jpe-innovations.com/cryo-nano-products/


Contact


For quotations, specials, or engineering services, please contact us at:
https://www.jpe-innovations.com/contact/


Drawings

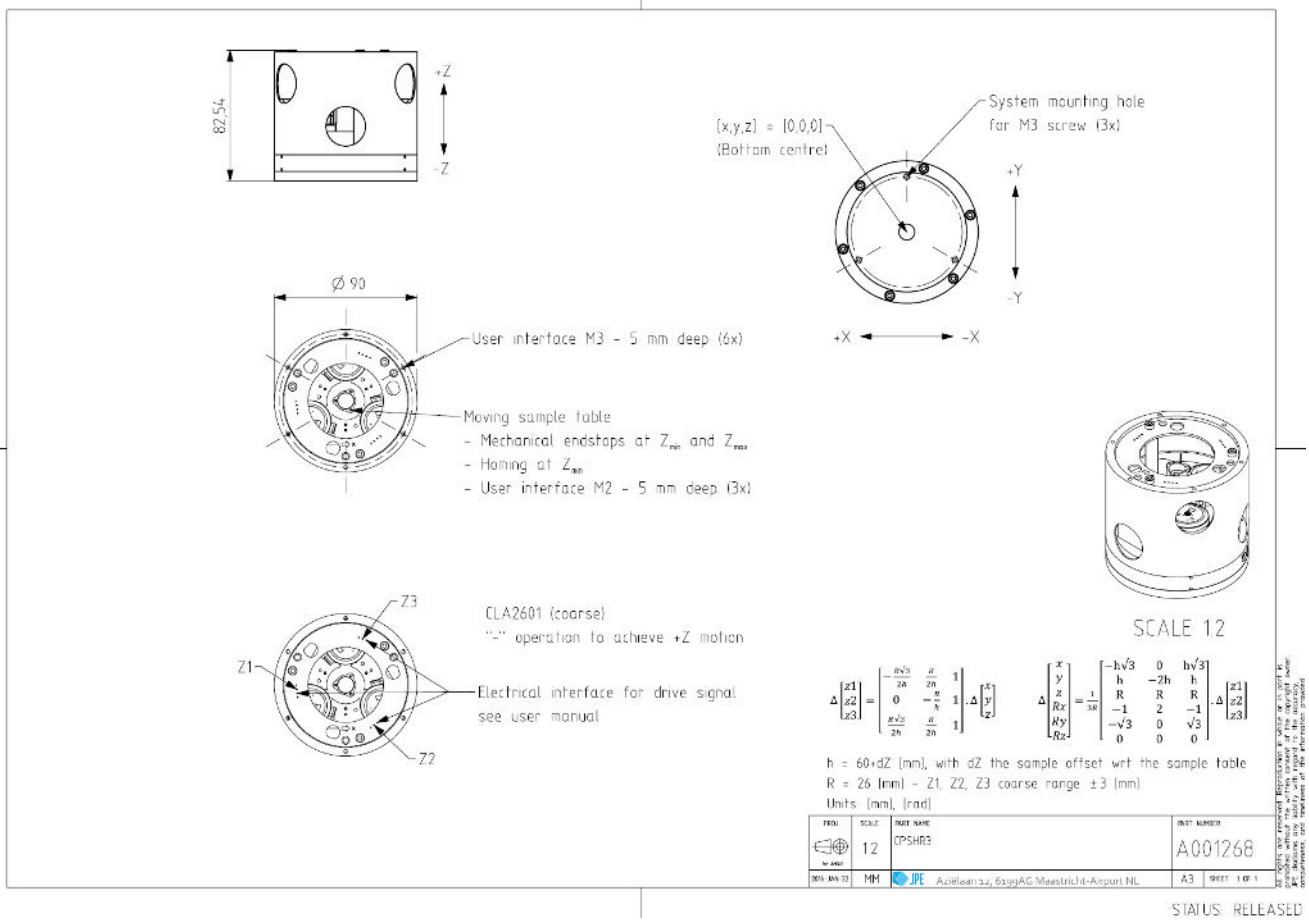

© JPE. Subject to change without notice. All data are outdated by any new release.
JPE disclaims any liability with regard to the accuracy, completeness, and timeliness of the information provided.




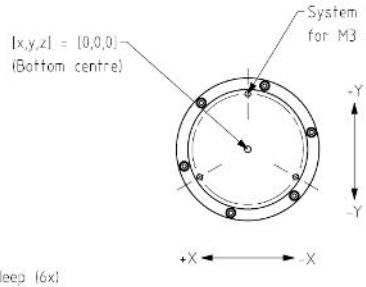





CLA2601 (coarse)
- "-" operation to achieve +Z motion
SCANNING
- A positive voltage will result in +Z motion



$$\Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix} = \begin{bmatrix} -\frac{R\sqrt{3}}{2h} & \frac{R}{2h} & 1 \\ 0 & -\frac{R}{h} & 1 \\ \frac{R\sqrt{3}}{2h} & \frac{R}{2h} & 1 \end{bmatrix} . \Delta\begin{bmatrix} x \\ y \\ z \end{bmatrix} \qquad \Delta\begin{bmatrix} x \\ y \\ z \\ Rx \\ Ry \\ Rz \end{bmatrix} = \frac{1}{3R}\begin{bmatrix} -h\sqrt{3} & 0 & h\sqrt{3} \\ h & -2h & h \\ R & R & R \\ -1 & 2 & -1 \\ -\sqrt{3} & 0 & \sqrt{3} \\ 0 & 0 & 0 \end{bmatrix} . \Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix}$$

h = 60+dZ [mm], with dZ the sample offset wrt the sample table
R = 26 [mm] - Z1, Z2, Z3 coarse range ± 3 [mm]
Units: [mm], [rad]


$$\Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix} = \begin{bmatrix} -\frac{R\sqrt{3}}{2h} & -\frac{R}{2h} & 1 \\ 0 & \frac{R}{h} & 1 \\ \frac{R\sqrt{3}}{2h} & -\frac{R}{2h} & 1 \end{bmatrix} . \Delta\begin{bmatrix} x \\ y \\ z \end{bmatrix} \qquad \Delta\begin{bmatrix} x \\ y \\ z \\ Rx \\ Ry \\ Rz \end{bmatrix} = \frac{1}{3R}\begin{bmatrix} -h\sqrt{3} & 0 & h\sqrt{3} \\ -h & 2h & -h \\ R & R & R \\ 1 & -2 & 1 \\ -\sqrt{3} & 0 & \sqrt{3} \\ 0 & 0 & 0 \end{bmatrix} . \Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix}$$


h = 54.85+dZ [mm], with dZ the sample offset wrt the sample table
R = 6,75 [mm] - Z1, Z2, Z3 scan range ±16e-3 [mm] (at 4K)
Units: [mm], [rad]


PROJ	SCALE	PART NAME	PART NUMBER
	12	CPSHR3-S	A001288
2016-MAY-12	MM	JPE Aziëlaan 12, 6199AG Maastricht-Airport NL	A3 SHEET 1 OF 1

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of JPE. Because we are continuously improving our products + services, JPE reserves the right to amend this document without further notice. JPE accepts no liability with regard to the accuracy, completeness, and timeliness of the information provided.

STATUS: RELEASED




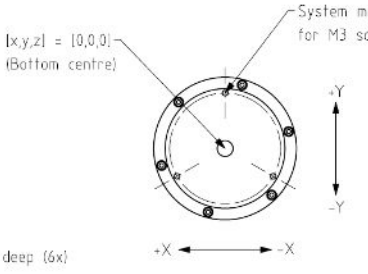





CLA2601 (coarse)
- "-" operation to achieve +Z motion

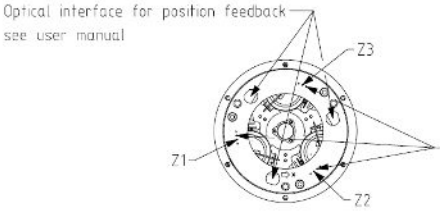

$$\Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix} = \begin{bmatrix} -\frac{R\sqrt{3}}{2h} & \frac{R}{2h} & 1 \\ 0 & -\frac{R}{h} & 1 \\ \frac{R\sqrt{3}}{2h} & \frac{R}{2h} & 1 \end{bmatrix} . \Delta\begin{bmatrix} x \\ y \\ z \end{bmatrix} \qquad \Delta\begin{bmatrix} x \\ y \\ z \\ Rx \\ Ry \\ Rz \end{bmatrix} = \frac{1}{3R}\begin{bmatrix} -h\sqrt{3} & 0 & h\sqrt{3} \\ h & -2h & h \\ R & R & R \\ -1 & 2 & -1 \\ -\sqrt{3} & 0 & \sqrt{3} \\ 0 & 0 & 0 \end{bmatrix} . \Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix}$$


h = 60+dZ [mm], with dZ the sample offset wrt the sample table
R = 26 [mm] - Z1, Z2, Z3 coarse range ± 3 [mm]
Units: [mm], [rad]


PROJ	SCALE	PART NAME	PART NUMBER
	12	CPSHR3-COE	A001289
2016-DEC-29	MM	JPE Aziëlaan 12, 6199AG Maastricht-Airport NL	A3 SHEET 1 OF 1


All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of JPE. Because we are continuously improving our products + services, JPE reserves the right to amend this document without further notice. JPE accepts no liability with regard to the accuracy, completeness, and timeliness of the information provided.

STATUS: RELEASED

© JPE. Subject to change without notice. All data are outdated by any new release.
JPE disclaims any liability with regard to the accuracy, completeness, and timeliness of the information provided.








User interface M3 - 5 mm deep (6x)

Moving sample table
- Mechanical endstops at Z_{min} and Z_{max}
- Homing at Z_{min}
- User interface M2 - 5 mm deep (3x)



Optical interface for position feedback
see user manual

CLA2601 (coarse)
- "-" operation to achieve +Z motion
SCANNING
- A positive voltage will result in +Z motion



Electrical interface for drive signal
see user manual

$$\Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix} = \begin{bmatrix} -\frac{R\sqrt{3}}{2h} & \frac{R}{2h} & 1 \\ 0 & -\frac{R}{h} & 1 \\ \frac{R\sqrt{3}}{2h} & \frac{R}{2h} & 1 \end{bmatrix} . \Delta\begin{bmatrix} x \\ y \\ z \end{bmatrix} \qquad \Delta\begin{bmatrix} x \\ y \\ z \\ Rx \\ Ry \\ Rz \end{bmatrix} = \frac{1}{3h} \begin{bmatrix} -h\sqrt{3} & 0 & h\sqrt{3} \\ h & -2h & h \\ R & R & R \\ -1 & 2 & -1 \\ -\sqrt{3} & 0 & \sqrt{3} \\ 0 & 0 & 0 \end{bmatrix} \Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix}$$

h = 60+dZ [mm], with dZ the sample offset wrt the sample table
R = 26 [mm] - Z1, Z2, Z3 coarse range ±3 [mm]
Units: [mm], [rad]

$$\Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix} = \begin{bmatrix} -\frac{R\sqrt{3}}{2h} & -\frac{R}{2h} & 1 \\ 0 & \frac{R}{h} & 1 \\ \frac{R\sqrt{3}}{2h} & -\frac{R}{2h} & 1 \end{bmatrix} . \Delta\begin{bmatrix} x \\ y \\ z \end{bmatrix} \qquad \Delta\begin{bmatrix} x \\ y \\ z \\ Rx \\ Ry \\ Rz \end{bmatrix} = \frac{1}{3R} \begin{bmatrix} -h\sqrt{3} & 0 & h\sqrt{3} \\ -h & 2h & -h \\ R & R & R \\ 1 & -2 & 1 \\ -\sqrt{3} & 0 & \sqrt{3} \\ 0 & 0 & 0 \end{bmatrix} . \Delta\begin{bmatrix} z1 \\ z2 \\ z3 \end{bmatrix}$$

h = 54,85+dZ [mm], with dZ the sample offset wrt the sample table
R = 6,75 [mm] - Z1, Z2, Z3 scan range ±16e-3 [mm] (at 4K)
Units: [mm], [rad]

PROJ	SCALE	PART NAME	PART NUMBER
	12	CPSHR3-S-COE	A001270
2016-001-01	MM	JPE Aziëlaan 12, 6199AG Maastricht-Airport NL	A3

STATUS: RELEASED

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. Recipient can solely rely on the contents of this document with regard to the accuracy, completeness and timeliness of the information provided.

© JPE. Subject to change without notice. All data are outdated by any new release.
JPE disclaims any liability with regard to the accuracy, completeness, and timeliness of the information provided.