

TCB-CBS₅ – THERMAL CONDUCTIVE BRAID CBS₅



Features

- OFHC copper, annealed
- Gold plated end plates
- Interfaces with CBS₅
- Non-magnetic

Description / Applications

Cooling of an experiment can be a challenge, especially in a vacuum without exchange gas. Introducing a Thermal Conductive Braid will help, as it forms a flexible bridge of high thermal conductivity between cold plate and experiment. A TCB can be integrated in any design, but end plates are matched for use with specific JPE positioners. One end plate is sandwiched between the cold plate and positioner, while the other is screwed to the top of the positioner.



Specifications

General info	
End plate compatibility	CBS ₅
Dimensions	See drawings below
Operational environmental conditions	20 mK to 375 K, ambient to UHV
Weight	9 g
Thermal properties	
Thermal conductance @5K	31 [mW/K]
Materials	
Main body	OFHC copper with gold plated end plates
Model specific information	
-50	Foil length is 50 mm, for use with a xyz stack

Ordering Information

Available models	
TCB-CBS ₅ -50	Thermal Conductive Braid for CBS ₅ – length 50 mm
Available Options	
None	Default delivery condition is Ultra High Vacuum compatible
Accessories	
None	
Mechanical and electrical information	
Download 3D step files and manuals from: https://www.jpe-innovations.com/cryo-nano-products/	
Contact	
For quotations, specials, or engineering services, please contact us at: https://www.jpe-innovations.com/contact/	

Drawings

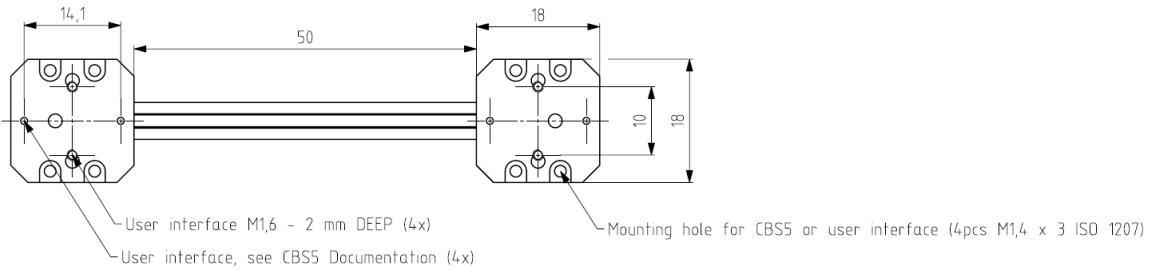

SCALE 1:1

PROJ 2023-FEB-17	SCALE 2:1	PART NAME TCB-CBS5-50	PART NUMBER A001554
MM	JPE	Aziëlaan 12, 6199AG Maastricht-Airport NL	A3 SHEET 1 OF 1

All rights are reserved. Reproduction in whole or in part is prohibited. JPE disclaims any liability with regard to the accuracy, completeness, and timeliness of the information provided.

STATUS: RELEASED